


SWL DC12HP

EXTENSIVELY EQUIPPED MOTOR CONTROLLER
WITH DIRECT CONTROL

| Specs | DC12HP |
|----------------------------|--|
| Application | Mobile/Fixed |
| Chain hoists | 12 |
| Control | Direct control max. 2.2 kW per channel |
| Housing | 19' housing 9 U |
| Installation depth | 55 cm |
| Connection | CEE plug 63 A |
| Monitoring | Phase failure / undervoltage |
| Phase indicator lights | 3 |
| Connection of chain hoists | 16-pin Harting |
| Link option | Up to 10 controllers |
| Link operation | Monitoring of all safety-relevant functions |
| Manual control | HR12 with 12 direction selector switches, illuminated GO button and emergency stop |
| Touchremote | SWL Touchremote TR96 |
| Motor whips | Harting 16-pin 4x CEE coupling 16A 4-pin red |
| Emergency stop | Yes |

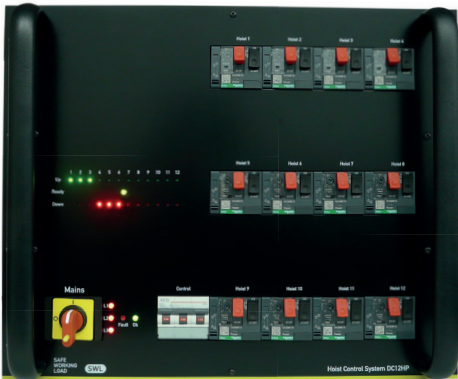

© 2025 SWL Safe Working Load