


# SWL DC8HP

EXTENSIVELY EQUIPPED MOTOR CONTROLLER  
WITH DIRECT CONTROL

Specs	DC8HP
Application	Mobile/Fixed
Chain hoists	8
Control	Direct control max. 2.2 kW per channel
Housing	19" housing 6 U
Installation depth	50 cm
Connection	CEE plug 32 A
Monitoring	Phase failure / undervoltage
Phase indicator lights	3
Connection of chain hoists	16-pin Harting
Link option	Up to 10 controllers
Link operation	Monitoring of all safety-relevant functions
Manual control	HR8 with 8 direction selector switches, illuminated GO button and emergency stop
Touchremote	SWL Touchremote TR96
Motor whips	Harting 16-pin 4x CEE coupling 16A 4-pin red
Emergency stop	Yes

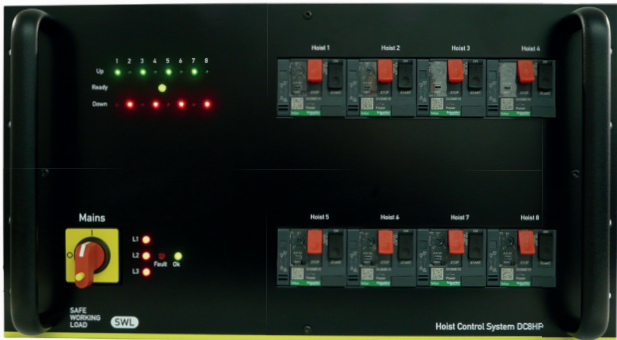

© 2025 SWL Safe Working Load